


INSERT



ITEM	QTY	MATERIAL	ITEM	QTY	MATERIAL
j	8	Screw, Lag, 1/2" x 2"	-	1	Seal, meter, plastic security
ai	1	Rod, Ground, 5/8" Min. Diameter	-	20	Conduit, PVC, 2 1/2", Schedule 40
aj	1	Clamp, Ground Rod	-	2	Post Pressure Treated, 6" x 6" x 10'
av	25	Conductor, Service Cable, 4/OAL Triplex, Sweetbrier	-	8	Copper, #2, 7 Strand Bare
cj	10	Wire, pole ground, #4 Copperweld, Soft Drawn	-	1	Coupling, 2 1/2", PVC
ga	1	Watthour meter, 5 dial, electronic	-	1	Bushing, 2 1/2", PVC
ga	1	Module, Turtle, 240v, #FASY-0584-0002	-	1	Male Adaptor, 2 1/2", PVC
gb	1	200A Meter Breaker U5168-XLT-200	-	1	Locknut, 2 1/2"

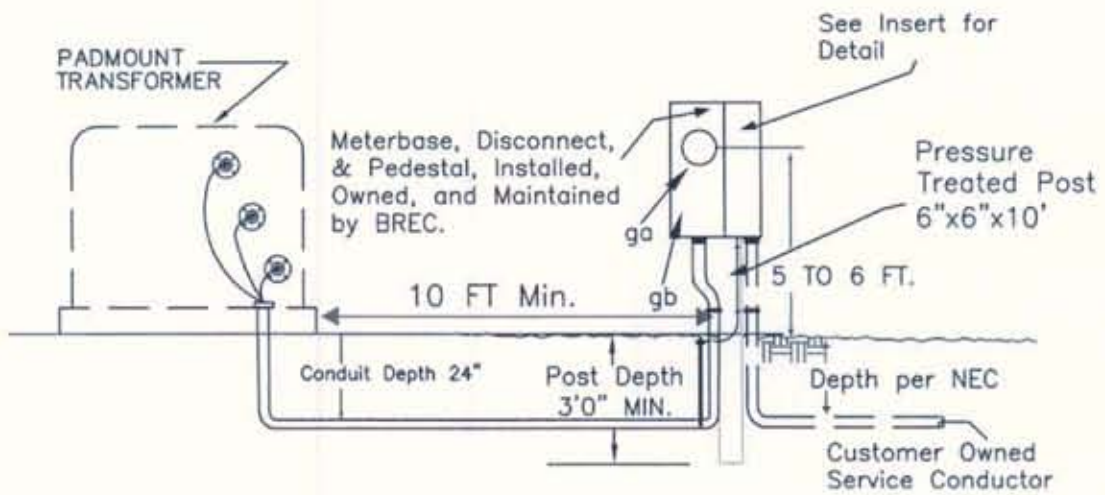

PADMOUNTED TRANSFORMER  
METER BASE COMBO  
200 AMPERE

DATE: 07-13-07

**Q2.200.PAD**